


SSKF

Spindelkontur (F)
Spindle contour (F)

SSKF..DIN
SSKF..JIS

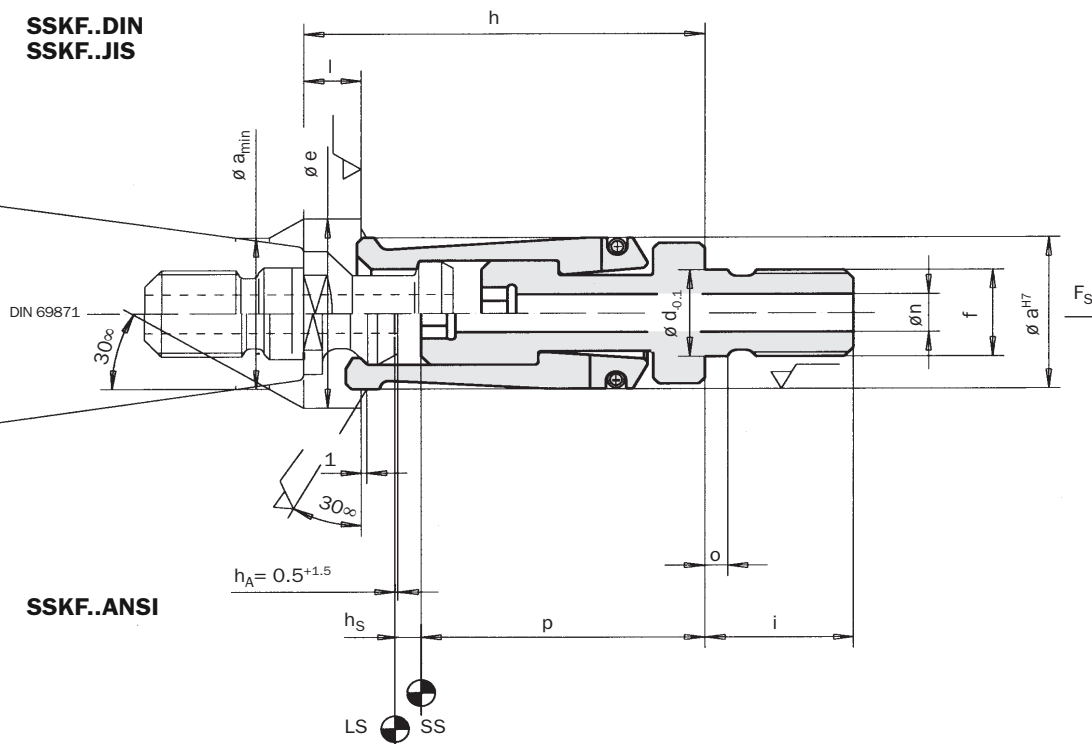

Spannsatz
Gripper

$\sqrt{Rz10, 56-58 \text{ HRC}}$

Maße | Technische Daten
Dimensions | Technical Data


Typ Type	a	d	e	f	h	i	l	n	o	p	h _s	F _{S max} kN	SW mm	M _A Nm
SSKF 30DIN	19	10	24	M 10	47	20	7,5	3,0	3	20,0	3,5	10	6	30
SSKF 30JIS	19	10	24	M 10	47	20	7,5	3,0	3	20,6	3,5	10	6	30
SSKF 30ANSI	19	10	24	M 10	47	20	7,5	3,0	3	33,0	3,0	10	6	30
SSKF 40DIN	28	16	35	M 16 x 1,5	70	26	10,0	7,0	4	40,0	4,5	18	8	65
SSKF 40JIS	28	16	35	M 16 x 1,5	70	26	10,0	7,0	4	37,5	4,0	18	8	65
SSKF 40ANSI	28	16	35	M 16 x 1,5	70	26	10,0	7,0	4	51,0	3,5	18	8	65
SSKF 45DIN/JIS	36	18	45	M 18 x 1,5	80	32	13,0	8,0	4	45,0	5,5	25	8	110
SSKF 45ANSI	36	18	45	M 18 x 1,5	80	32	13,0	8,0	4	55,0	4,5	25	8	110
SSKF 50DIN/JIS	43	22	54	M 22 x 1,5	90	35	16,0	9,5	5	50,5	6,0	35	10	160
SSKF 50ANSI	43	22	54	M 22 x 1,5	90	35	16,0	9,5	5	60,0	5,0	35	10	160
SSKF 60DIN	62	30	77	M 30 x 1,5	125	40	23,0	16,0	5	77,5	8,0	70	17	470
SSKF 60JIS	62	30	77	M 30 x 1,5	125	40	23,0	16,0	5	69,5	8,0	70	17	470
SSKF 60ANSI	62	30	77	M 30 x 1,5	125	40	23,0	16,0	5	79,8	7,5	70	17	470

SKE

Spannsatz Gripper

Spindelkontur

Spindle contour **(F)**

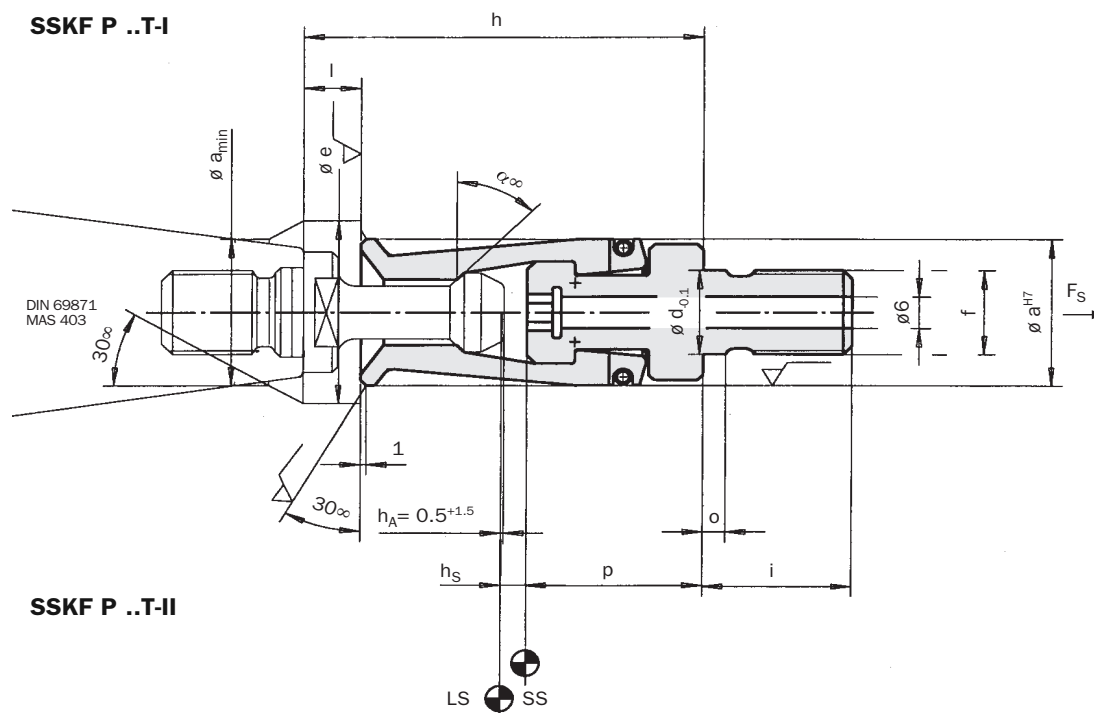

✓ Rz10, 56-58 HRC

Maße | Technische Daten
Dimensions | Technical Data

Type Type	α + 30'	a	d	e	f	h	i	l	n	o	P	h_s	F_s^{max} kN	SW mm	M_A Nm
SSKF P30T-I	45°	19	10	24	M 10	47	20	7,5	3,0	3	21,0	3,5	10	6	30
SSKF P30T-II	30°	19	10	24	M 10	47	20	7,5	3,0	3	21,0	3,5	10	6	30
SSKF P40T-I	45°	28	16	35	M 16 x 1,5	70	26	10,0	6,0	4	31,0	4,5	18	6	65
SSKF P40/1T-I**	45°	28	16	35	M 16 x 1,5	70	26	10,0	6,0	4	34,0	4,5	18	6	65
SSKF P40T-II	30°	28	16	35	M 16 x 1,5	70	26	10,0	6,0	4	31,0	4,5	18	6	65
SSKF P40/1T-II**	30°	28	16	35	M 16 x 1,5	70	26	10,0	6,0	4	35,0	4,5	18	6	65
SSKF P45T-I	45°	36	18	45	M 18 x 1,5	80	32	13,0	8,0	4	35,0	5,5	25	8	110
SSKF P45T-II	30°	36	18	45	M 18 x 1,5	80	32	13,0	8,0	4	35,0	5,5	25	8	110
SSKF P50T-I	45°	43	22	54	M 22 x 1,5	90	35	16,0	9,5	5	39,5	6,0	35	10	160
SSKF P50T-II	30°	43	22	54	M 22 x 1,5	90	35	16,0	9,5	5	39,5	6,0	35	10	160
SSKF P60T-I	45°	62	30	77	M 30 x 1,5	125	40	23,0	16,0	5	52,5	8,0	70	17	450
SSKF P60T-II	30°	62	30	77	M 30 x 1,5	125	40	23,0	16,0	5	52,5	8,0	70	17	450

**** Nur für Werkzeugschäfte BT-MAS403.**

**** For tool shanks BT-MAS403 only.**