

- For tools with straight shank DIN 1835-A
- Pre-balanced per ISO 1940-1 up to 10,000 rpm
- Maximum runout between outer taper and collet housing is 0.003 mm
- Coolant tube to be ordered separately

All dimensions in mm.

D-HSK Size	Size	D ₁	L	D ₂	D ₃	L ₁	G	kg/lb	Order Number
32	ER16	0.5-10	80	28	-	-	M-8	0.30/0.66	612.232.016.080
40	ER16	0.5-10	80	28	-	-	M-10	0.40/0.88	612.240.016.080
50	ER16	0.5-10	100	28	-	-	M-10	0.50/1.10	612.250.016.100
63	ER16	0.5-10	75	28	-	-	M-10	0.90/1.98	612.263.016.075
63	ER16	0.5-10	100	28	-	-	M-10	1.00/2.20	612.263.016.100
63	ER16	0.5-10	160	28	45	85	M-10	1.70/3.75	612.263.016.160
80	ER16	0.5-10	100	28	-	-	M-12	1.20/2.65	612.280.016.100
80	ER16	0.5-10	160	28	45	85	M-12	2.10/4.63	612.280.016.160
100	ER16	0.5-10	100	28	-	-	M-12	2.90/6.39	612.290.016.100
100	ER16	0.5-10	160	28	45	85	M-12	3.40/7.50	612.290.016.160

OPTIONAL



Standard Locknut

Collet

ER16

049901 08 03




Balanced Locknut

049901 03 03



Bearing Locknut

049901 04 03

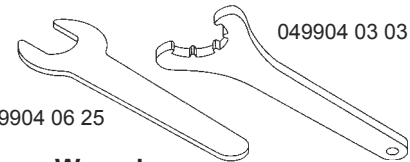

049904 06 25

Wrench

049904 06 25 (Standard)
049904 03 03 (Balanced)
049904 06 25 (Bearing)

Other sizes and custom types are available - please contact us for more information.