

- For tools with straight shanks DIN 1835-A
- Pre-balanced per ISO 1940-1 up to 10,000 rpm
- Maximum runout between outer taper and collet housing is 0.003 mm

All dimensions in mm.

D-HSK	Size	D ₁	L	D ₂	G	kg/lb	Order Number
25	ER16	0.5-10	80	28	M-6	0.25/0.55	652.225.016.080
32	ER16	0.5-10	80	28	M-8	0.30/0.66	652.232.016.080
40	ER16	0.5-10	80	28	M-10	0.40/0.88	652.240.016.080
50	ER16	0.5-10	80	28	M-10	0.50/1.10	652.250.016.080
63	ER16	0.5-10	80	28	M-10	0.80/1.76	652.263.016.080

OPTIONAL



**Standard
Locknut**

Collet

ER16

049901 08 03




**Balanced
Locknut**

049901 03 03



**Bearing
Locknut**

049901 04 03

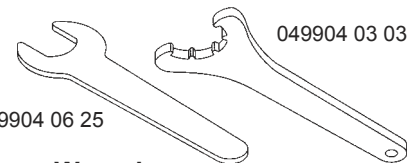

049904 06 25

Wrench

049904 06 25 (Standard)
049904 03 03 (Balanced)
049904 06 25 (Bearing)

Other sizes and custom types are available - please contact us for more information.