


For tapered Morse taper tools DIN 228-B

Rev. 12-1101 Page 1 of 1
Uncontrolled Document

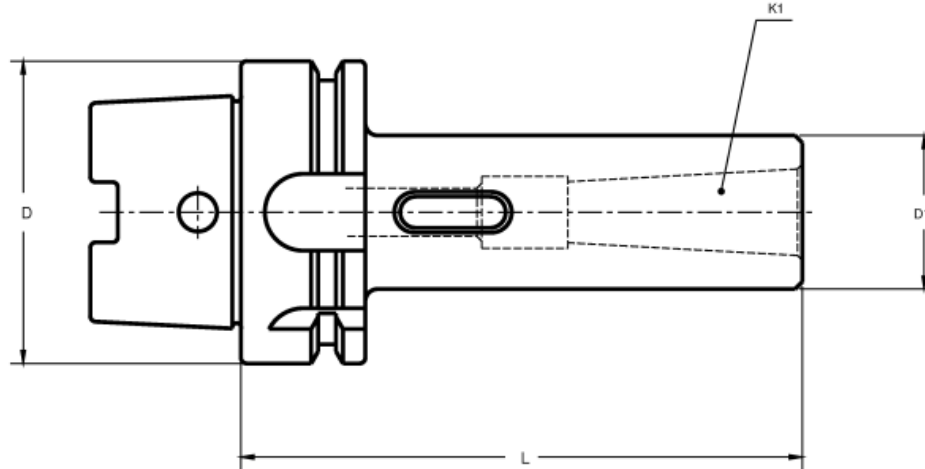

- Maximum circular deviation between outer taper and K1 ≤ 0.008 mm.
- Coolant tube to be ordered separately.


Taper (D)	Length (L)	D1	K1	Part Number
HSK-A 50	100	25	1	681.00314110321
HSK-A 50	120	32	2	681.00314110331
HSK-A 50	140	40	3	681.00314110341
HSK-A 63	100	25	1	681.00314110421
HSK-A 63	120	32	2	681.00314110431
HSK-A 63	140	40	3	681.00314110441
HSK-A 63	160	48	4	681.00314110451
HSK-A 80	110	25	1	681.00314110521
HSK-A 80	120	32	2	681.00314110531
HSK-A 100	110	25	1	681.00314110621
HSK-A 100	120	32	2	681.00314110631
HSK-A 100	150	40	3	681.00314110641
HSK-A 100	170	48	4	681.00314110651
HSK-A 100	200	63	5	681.00314110661

Available for HSK-A 50, 63, 80, 100

TAC Rockford Product Line

Machine Tool Gauges, Tool Changer Alignment, Runout Test Arbors, Workholding Systems, Tool Holders, Adapters and Extensions, Tool Holder Blanks, Machine Tool Accessories, Coolant Tubes and Gauges, Heat Shrink Systems, Rapid Prototyping


Tool Holders



Gauges



Accessories



Rapid Prototyping

