


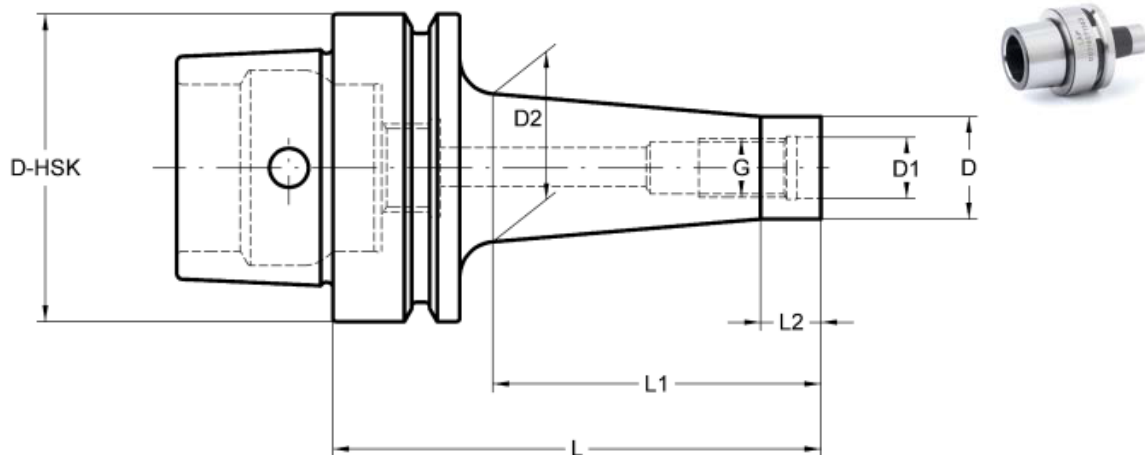

- Maximum circular deviation between K and D1 ≤ 0.005 mm.
- Balanced according to ISO 1940-1 up to 15,000 rpm.
- We have latest methods for dynamic balancing up to 50,000 rpm.
- Coolant tube to be ordered separately.


Taper (D-HSK)	Length (L)	M Thread (G)	Part Number
HSK-E 40	50	6	681.00318571201
HSK-E 40	50	8	681.00318571202
HSK-E 50	55	6	681.00318571301
HSK-E 50	55	8	681.00318571302
HSK-E 50	55	10	681.00318571303
HSK-E 40	100	6	681.00318573201
HSK-E 40	100	8	681.00318573202
HSK-E 50	105	6	681.00318573301
HSK-E 50	105	8	681.00318573302
HSK-E 50	105	10	681.00318573303

Available for HSK-E 40, 50


TAC Rockford Product Line

Machine Tool Gauges, Tool Changer Alignment, Runout Test Arbors, Workholding Systems, Tool Holders, Adapters and Extensions, Tool Holder Blanks, Machine Tool Accessories, Coolant Tubes and Gauges, Heat Shrink Systems, Rapid Prototyping


Tool Holders



Gauges



Accessories



Rapid Prototyping

