


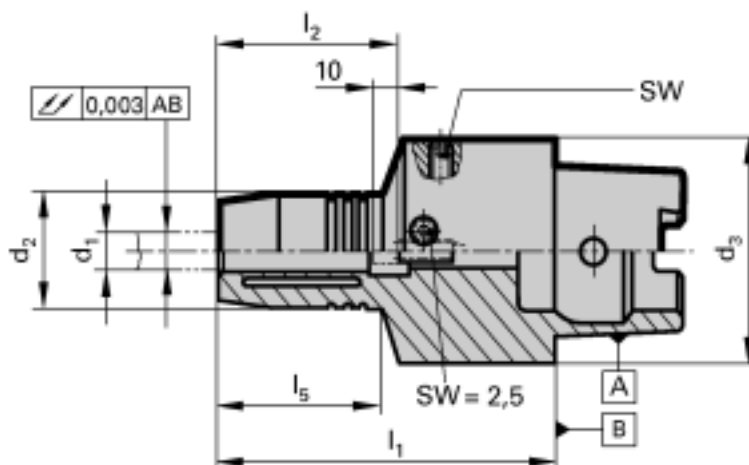

Product Information

- Balancing quality: G6.3 / 15,000 rpm.
- Robust, radially operated length setting.
- Clamping diameter for shank tolerance h6.

Scope of Delivery

- Includes clamping key.
- Includes hexagon key for radial length setting.

Taper (d3)	Length (l1)	Ø h6 (d1)	Part Number
HSK-C 40	60	6	683.395.006.040
HSK-C 50	60	6	683.395.006.050
HSK-C 63	60	6	683.395.006.063
HSK-C 40	60	8	683.395.008.040
HSK-C 50	60	8	683.395.008.050
HSK-C 63	60	8	683.395.008.063
HSK-C 40	65	10	683.395.010.040
HSK-C 50	65	10	683.395.010.050
HSK-C 63	65	10	683.395.010.063
HSK-C 40	70	12	683.395.012.040
HSK-C 50	75	12	683.395.012.050
HSK-C 63	75	12	683.395.012.063
HSK-C 50	75	14	683.395.014.050
HSK-C 63	75	14	683.395.014.063
HSK-C 50	80	16	683.395.016.050
HSK-C 63	80	16	683.395.016.063
HSK-C 50	80	18	683.395.018.050
HSK-C 63	80	18	683.395.018.063
HSK-C 50	80	20	683.395.020.050
HSK-C 63	80	20	683.395.020.063
HSK-C 63	95	25	683.395.025.063
HSK-C 63	100	32	683.395.032.063

Available for HSK-C 40, 50, 63