HSK-C hydraulic chucks with radial length setting and increased clamping force

Product information
- balancing quality: G6.3 / 15,000 rev./min
- robust, radially operated length setting
- clamping-Ø for shank tolerance h6

Scope of delivery
- incl. clamping key Art.-Nr. 4912
- incl. hexagon key inserts for radial length setting

Guhring no. 4295

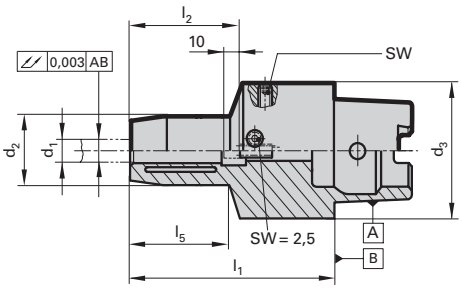

HSK-C d_3	for clamping-Ø d_1 h6 mm	d_2 mm	l_1 mm	l_2 mm	l_5 mm	SW	kg	Code no.	Availability
40	6	26	60	37	32.5	5	0.5	6,040	•
40	8	28	60	37	33.0	5	0.5	8,040	•
40	10	30	65	41	38.5	5	0.5	10,040	•
40	12	32	70	46	44.0	5	0.6	12,040	•
50	6	26	60	37	29.5	5	0.6	6,050	•
50	8	28	60	37	29.5	5	0.6	8,050	•
50	10	30	65	41	35.5	5	0.6	10,050	•
50	12	32	75	46	46.0	5	0.8	12,050	•
50	14	34	75	46	47.0	5	0.9	14,050	•
50	16	38	80	49	53.0	5	0.9	16,050	•
50	18	40	80	49	53.5	5	1.0	18,050	•
50	20	42	80	51	54.0	5	1.0	20,050	•
63	6	26	60	37	26.0	5	1.0	6,063	•
63	8	28	60	37	26.0	5	1.1	8,063	•
63	10	30	65	41	32.0	5	1.1	10,063	•
63	12	32	75	46	42.5	5	1.1	12,063	•
63	14	34	75	46	43.0	5	1.1	14,063	•
63	16	38	80	49	49.0	5	1.2	16,063	•
63	18	40	80	49	50.0	5	1.2	18,063	•
63	20	42	80	51	50.5	5	1.2	20,063	•
63	25	50	95	57	52.0	5	1.8	25,063	•
63	32	60	100	61	60.0	5	2.3	32,063	•