

HSK-C hydraulic chucks

Product information


- balancing quality: G6.3 / 15,000 rev./min
- axial length setting
- clamping-Ø for shank tolerance h6

Scope of delivery

- incl. setting screw Guhring no. 4900
- incl. clamping key Guhring no. 4912

Guhring no.

4367

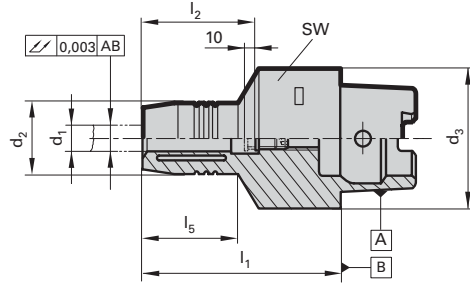

HSK-C d ₃	for clamping-Ø d ₁ h6 mm	d ₂ mm	l ₁ mm	l ₂ mm	l ₅ mm	incl. setting screw 4900 ...	SW	kg	Code no.	Availability
32	6	26	65.0	37.5	33	6,014	4	0.4	6,032	○
32	8	28	67.0	37.5	34	8,014	4	0.4	8,032	○
32	10	30	72.7	42.5	39	8,014	4	0.4	10,032	○
32	12	31.5	76.0	47.5	-	8,014	4	0.4	12,032	○
40	6	26	60.0	37.0	35	6,014	4	0.4	6,040	○
40	8	28	60.0	37.0	36	8,014	4	0.4	8,040	○
40	10	30	65.0	41.0	41	8,014	4	0.5	10,040	○
40	12	32	70.0	46.0	47	8,014	4	0.6	12,040	○
50	6	26	60.0	37.0	30	6,014	4	0.7	6,050	○
50	8	28	60.0	37.0	30	8,014	5	0.7	8,050	○
50	10	30	65.0	41.0	35	10,014	5	0.7	10,050	○
50	12	32	75.0	46.0	44	12,014	5	0.8	12,050	○
50	14	34	75.0	46.0	46	12,014	5	0.7	14,050	○
50	16	38	80.0	49.0	51	16,014	5	0.8	16,050	○
50	18	40	80.0	49.0	51	16,014	5	1.5	18,050	○
50	20	42	80.0	51.0	52	20,014	5	1.2	20,050	○
63	6	26	60.0	37.0	25	6,014	5	1.0	6,063	○
63	8	28	60.0	37.0	25	8,014	5	1.0	8,063	○
63	10	30	65.0	41.0	31	10,014	5	1.0	10,063	○
63	12	32	75.0	46.0	41	12,014	5	1.1	12,063	○
63	14	34	75.0	46.0	42	12,014	5	1.0	14,063	○
63	16	38	80.0	49.0	48	16,014	5	1.1	16,063	○
63	18	40	80.0	49.0	48	16,014	5	1.2	18,063	○
63	20	42	80.0	51.0	49	20,014	5	1.2	20,063	○
63	25	57	95.0	57.0	63	20,014	5	2.0	25,063	○
63	32	64	100.0	61.0	-	16,014	5	2.0	32,063	○

Hydraulic chucks