HSK-C hydraulic chucks with radial length setting

Product information
- balancing quality: G6.3 / 15,000 rev./min
- robust, radially operated length setting
- clamping-Ø for shank tolerance h6

Scope of delivery
- incl. clamping key Guhring no. 4912
- incl. hexagon key for radial length setting

Guhring no. **4395**

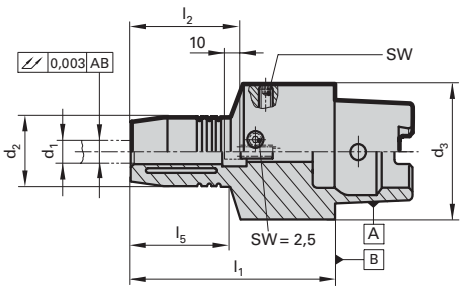

HSK-C d_3	for clamping-Ø d_1 h6 mm	d_2 mm	l_1 mm	l_2 mm	l_5 mm	SW	kg	Code no.	Availability
40	6	26.0	60	35.6	30.0	4	0.50	6,040	○
40	8	28.0	60	35.6	30.0	4	0.50	8,040	○
40	10	30.0	65	39.6	35.0	4	0.50	10,040	○
40	12	32.0	70	45.0	40.0	4	0.60	12,040	○
50	6	26.0	60	35.6	30.0	4	0.60	6,050	○
50	8	28.0	60	35.6	30.0	5	0.60	8,050	○
50	10	30.0	65	39.6	35.0	5	0.60	10,050	○
50	12	32.0	75	45.6	40.0	5	0.80	12,050	○
50	14	34.0	75	45.6	40.0	5	0.90	14,050	○
50	16	38.0	80	49.0	50.0	5	0.90	16,050	○
50	18	40.0	80	49.0	50.0	5	1.00	18,050	○
50	20	42.0	80	50.6	50.0	5	1.00	20,050	○
63	6	26.0	60	35.6	25.0	5	1.00	6,063	○
63	8	28.0	60	35.6	25.0	5	1.10	8,063	○
63	10	30.0	65	39.6	31.0	5	1.10	10,063	○
63	12	32.0	75	45.6	40.0	5	1.10	12,063	○
63	14	34.0	75	45.6	40.0	5	1.10	14,063	○
63	16	38.0	80	49.0	46.0	5	1.20	16,063	○
63	18	40.0	80	49.0	46.0	5	1.20	18,063	○
63	20	42.0	80	50.6	48.0	5	1.20	20,063	○
63	25	57.0	95	57.0	59.5	6	1.80	25,063	○
63	32	62.5	100	61.0	60.5	6	2.30	32,063	○