HSK-A hydraulic chuck MQL for the automatic tool change

Product information
- new MQL norm
- balancing quality: G6.3 / 15,000 rev./min
- clamping-Ø for shank tolerance h6
- axial length setting

Scope of delivery
- incl. MQL length adjustment screw with sealing lip and coolant delivery set Guhring no. 4939
- incl. clamping key Guhring no. 4912

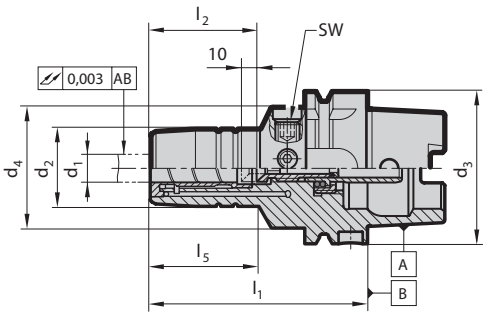

Guhring no. 4210

HSK-A d_3	for clamping-Ø d_1 h6 mm	d_2 mm	d_4 mm	l_1 mm	l_2 mm	l_5 mm	SW	kg	Code no.	Availability
50	6	26	40	80	36	38	4	0.95	6,050	•
50	8	28	40	80	36	38	4	0.95	8,050	•
50	10	30	40	85	40	44	4	0.95	10,050	•
50	12	32	40	90	45	49	4	0.95	12,050	•
50	14	34	40	90	45	49	4	0.95	14,050	•
50	16	38	53	95	48	36	5	1.25	16,050	•
50	18	40	57	95	48	36	5	1.25	18,050	•
50	20	42	60	100	50	39	5	1.25	20,050	•
63	6	26	50	80	36	34.5	5	1.25	6,063	•
63	8	28	50	80	36	35.5	5	1.25	8,063	•
63	10	30	50	85	40	40	5	1.25	10,063	•
63	12	32	50	90	45	45	5	1.35	12,063	•
63	14	34	50	90	45	46	5	1.35	14,063	•
63	16	38	50	95	48	51	5	1.45	16,063	•
63	18	40	50	95	48	52	5	1.45	18,063	•
63	20	42	50	100	50	58	5	1.45	20,063	•
63	25	57	63	115	56	50	6	2.45	25,063	•
63	32	64	75	120	60	58	6	3.10	32,063	•
100	6	26	50	85	36	36	5	2.60	6,100	•
100	8	28	50	85	36	36	5	2.60	8,100	•
100	10	30	50	90	40	42	5	2.60	10,100	•
100	12	32	50	95	45	47	5	2.65	12,100	•
100	14	34	50	95	45	47	5	2.65	14,100	•
100	16	38	50	100	48	53	5	2.85	16,100	•
100	18	40	50	100	48	53	5	2.85	18,100	•
100	20	42	50	105	50	59	5	3.35	20,100	•
100	25	57	63	115	56	67	6	3.50	25,100	•
100	32	64	75	120	60	72	6	3.95	32,100	•